



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

DATA

Maximum Temperature	80°c
Minimum Pressure	1.0 bar
Maximum Pressure	12.0 bar
Connections Male	½” BSP
Adjustable Flow rate	4-8 Litres per minute
Weight	75 g
Length	22 cm
Width (Face)	6.5 cm

Aquiv8 412 Water Saving Shower

MATERIALS

Body Shock Proof ABS Plastic

APPLICATION


Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. Flow rates can be adjusted to suit bespoke requirements. 412units particularly suit residential applications that require functionality combined with good looks. **Units not suitable for use with low pressure gravity fed system**



ORDER NUMBER

412 Chrome Finish

- Can cut water & energy bills by up to 50% with no loss of performance.
- Anti Scale
- No Moving Parts to Replace
- Robust & Reliable
- 3 year Guarantee
- Approved on Governments Water Technology List as water saving

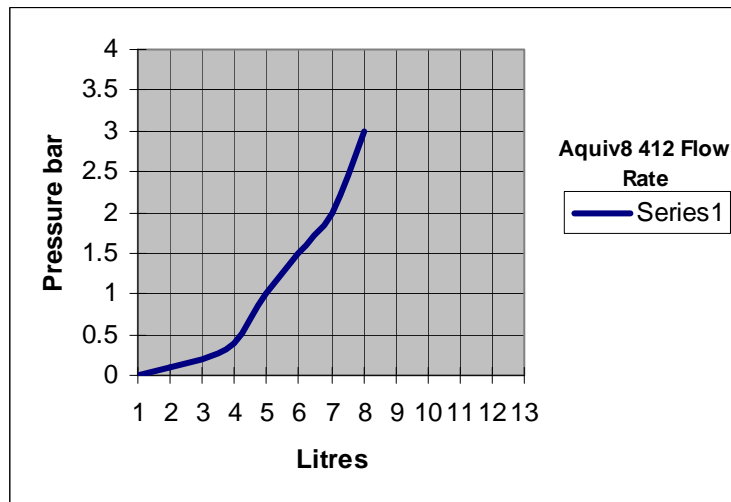

01628 529024

www.alchallis.com

info@alchallis.com

